

STONE FINISH

Size:180x1220mm Thickness: 4.0mm
Wear layer: 0.3mm



FT-10



FT-09




FASTRAC LVT LUXURY VINYL TILE



FASTRAC LVT



LET US
HELP YOU
ACHEIVE
YOUR GOALS

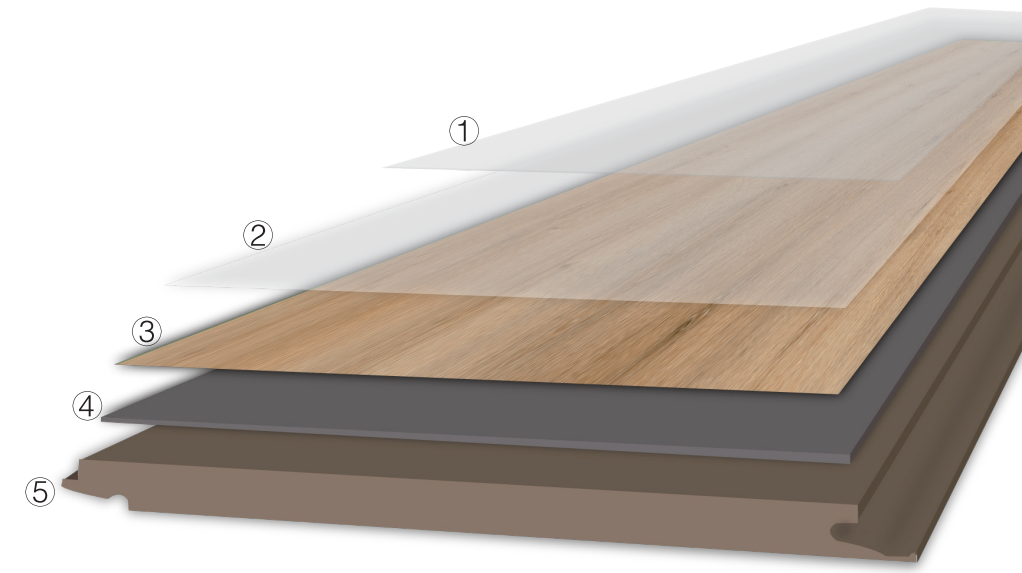

- ① UV coating
- ② High-density wear layer
- ③ Printing layer
- ④ Fiber-glass layer
- ⑤ Backing layer

Click Vinyl Tile is an innovative form of vinyl flooring. It is becoming an increasingly popular and affordable alternative to wood or stone. The realistic look of either wood, stone or ceramic tile is extremely hard wearing and resilient to daily wear and tear. It has a scratch resistant surface and waterproof making it ideal for any area.

The product is made up of multiple thin layers so that the flooring is still flexible but very durable and easy to look after. Click system ensures fast and simple installation.

TESTING ITEMS	TESTING METHOD	TESTING RESULT
Manufacturing standard	EN649	PASS
Total thickness	EN428	2.0-6.0mm
Thickness of wear layer	EN429	0.07-0.7mm
Size tile(L x W)	EN427	Click: 150x935,150x1220,180x1220,229x1220,305x610mm Dry back: 4"/6"/12"/18"x36", 6"/7"/7.25"/9"/12"/36"x48", 6"/12"/24"x24", 18"x18"
Surface treatment		Glossy, semi-atte and matte
Peeling strength of layers	EN431	PASS
Sound, impact, reduction	ENISO717-2	>4.8dB
Fire resistance	EN13501-1	Bf1-S1
Dimension stability	EN434	<0.10%
After exposure to heat color fastness to light	ISO105B02	Grade >6
Static indentation	EN433	≤0.10mm
Flexibility	EN435	PASS
Abrasion resistance	EN660	Class T
Castor chair resistance	EN425	PASS
Slip resistance	DIN51130	R9
Anti-sliding properties	EN13893	Class DS
Usage category	EN685	21/34
Resistance to chemicals		PASS
Light fastness	ISO105-B02-3	>6



FASTRAC LVT LUXURY VINYL TILE

WOOD FINISH

Size:180x1220mm Thickness: 4.0mm
Wear layer: 0.3mm



FT-01



FT-02



FT-03



FT-07

WOOD FINISH

Size:180x1220mm Thickness: 4.0mm
Wear layer: 0.3mm



FT-04



FT-06



FT-05



FT-08

FASTRAC LVT LUXURY VINYL TILE

