

نيوم، بيرفكت، اوزون - شرائح فينيل فاخر


السريع للأرضيات والمفروشات

المواصفات التقنية

Type & Composition		PVC Laminated Floor Covering
Application		Commercial, Residential
Surface Treatment		PU & Anti-bacterial, Per design
Profile		Beveled / Non-beveled, Per design
Tile Size (mm)	EN 427	184 x 950
Total Thickness (mm)	ISO 24346 (EN 428)	3.0
Wear Layer Thickness (mm)	ISO 24340 (EN 429)	0.3
Fire Rating	EN 13501-1	Bfl - S1
	Mekel Bumer Test	Pass
Heat Stability	KSM 3802	0.3mm / 0.05 (80 °C + 2°C, 6hr / hr)
Slip Resistance	BS 7976-2	PVC Laminated Floor Covering RZ Surface Roughness : Moderate
Residual Indentation	EN ISO 24343-1 (EN 433)	≤ 0.10 mm
Color Fastness	ISO 105-B02	≥ 6
Dimensional Stability	ISO 23999 (EN 434)	≤ 0.25 %
Flexibility	EN 435	No Crack was found
Electrical Behavior	EN 1081	Pass

Dryback

Eco-friendly various function flooring

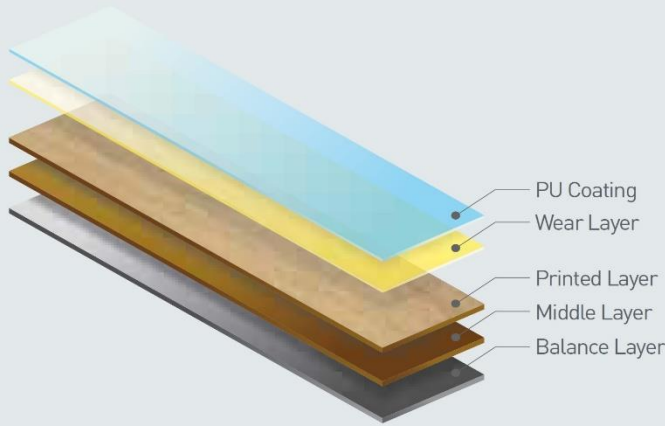

- High Density PU Coating
- Application of US EPA approved organic and inorganic hybrid antibacterial agents
- Recycled Material
- Various Color / Pattern Design Collection